


PM Fiber Patchcord

Features


- Low Insertion Loss
- High Return Loss
- High Reliability
- High Stability

Applications

- Fiber Optic Instruments
- Fiber Sensors
- Fiber Lasers
- Coherent Detecting
- Research

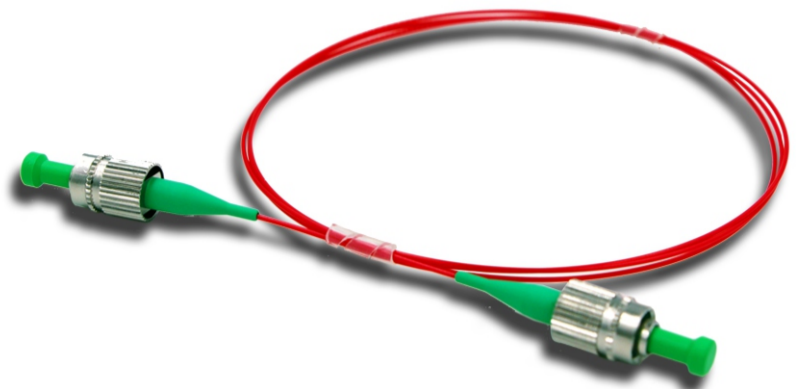

◆ Package Dimensions

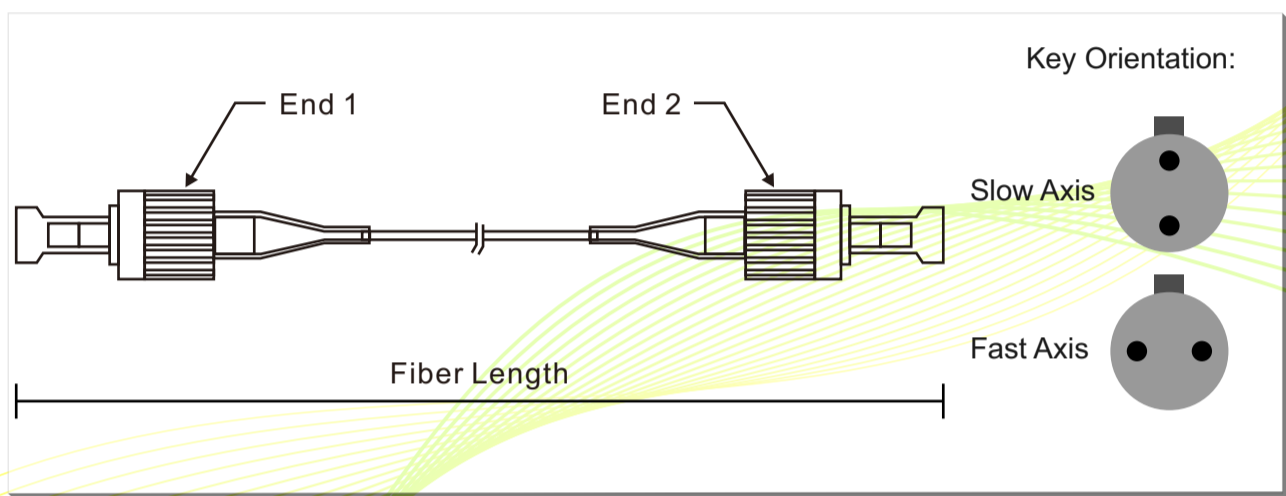

Address: 2F,DF Industrial Park,Shanghenglang Community,Dalang,Longhua New District,Shenzhen,P.R.C.518109.
 www.bonaphotonics.com sales@bonaphotonics.com Tel:+0755-21035679

December 2019

Bonacom Technology reserves the right to change any specifications without prior notice.

BN-CG-IS-19-2

◆ Specifications

Parameter	Unit	Value			
Connector Type	-	FC, SC,LC/,MU			
Center Wavelength	nm	1310/1550	980/1060	850	780
Max. Insertion Loss	nm	0.3	0.5	0.8	0.8
Min. Extinction Ratio at 23°C	dB	23	23	22	22
Min. Return loss	UPC Type	dB	50		
	APC Type	dB	60		
Fiber Type	-	PM Panda fiber			
Key Orientation	-	Slow Axis			
Tolerance for Axis Alignment	deg	±3			
Operating Temperature	°C	-20~+70			
Storage Temperature	°C	-40~+85			

The default connector key is aligned to slow axis.

◆ Ordering Information

PMJP-1111-2-333-456-77

111	-Center Wavelength:	1550=1550nm,1310=1310nm,.....,0850=850nm
2	-Key Orientation:	S=Slow axis, F=Fast axis
333	-Fiber Type:	001=PM1550, 002=PM1310, 003=PM980, 004=Hi1060, 008=SMF-28E
4	-Connector for Input:	0=FC/UPC,1=FC/APC,2=SC/UPC,3=SC/APC,4=LC/UPC,5=LC/APC, N=None
5	-Connector for Output:	0=FC/UPC,1=FC/APC,2=SC/UPC,3=SC/APC,4=LC/UPC,5=LC/APC, N=None
6	-Pigtail Type:	0=250µm bare fiber, 1=900µm loose tube, 2=2.0mm loose tube, 3=3.0mm loose tube
77	-Fiber Length:	00=0.8m, 01=1m, 20=20m

Address: 2F,DF Industrial Park,Shanghenglang Community,Dalang,Longhua New District,Shenzhen,P.R.C.518109.
 www.bonaphotonics.com sales@bonaphotonics.com Tel:+0755-21035679

December 2019

Bonacom Technology reserves the right to change any specifications without prior notice.

BN-CG-IS-19-2