


2 μ m PM Fused WDM

Features


- High Extinction Ratio
- High Isolation
- Low Insertion Loss
- High stability & Reliability

Applications

- Testing Instruments
- Coherent Communication
- EDFA
- Fiber Sensor

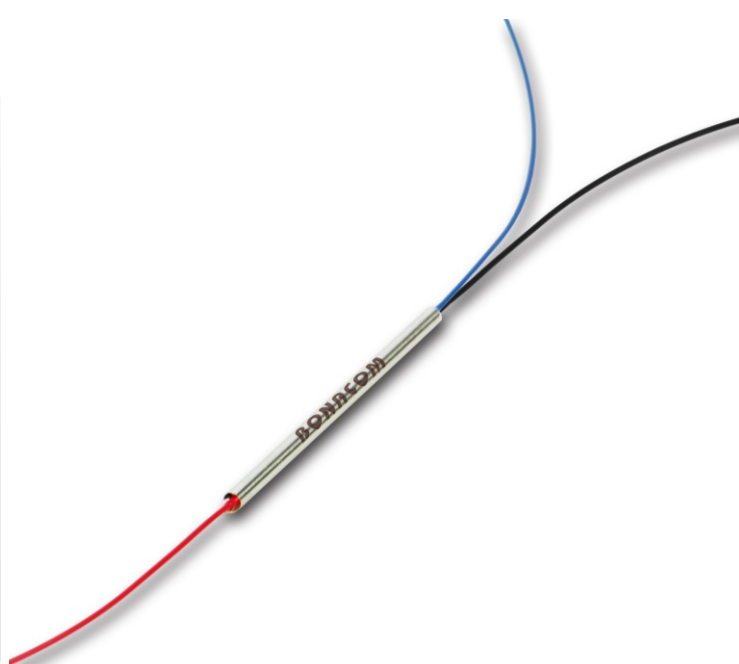

Package Dimensions

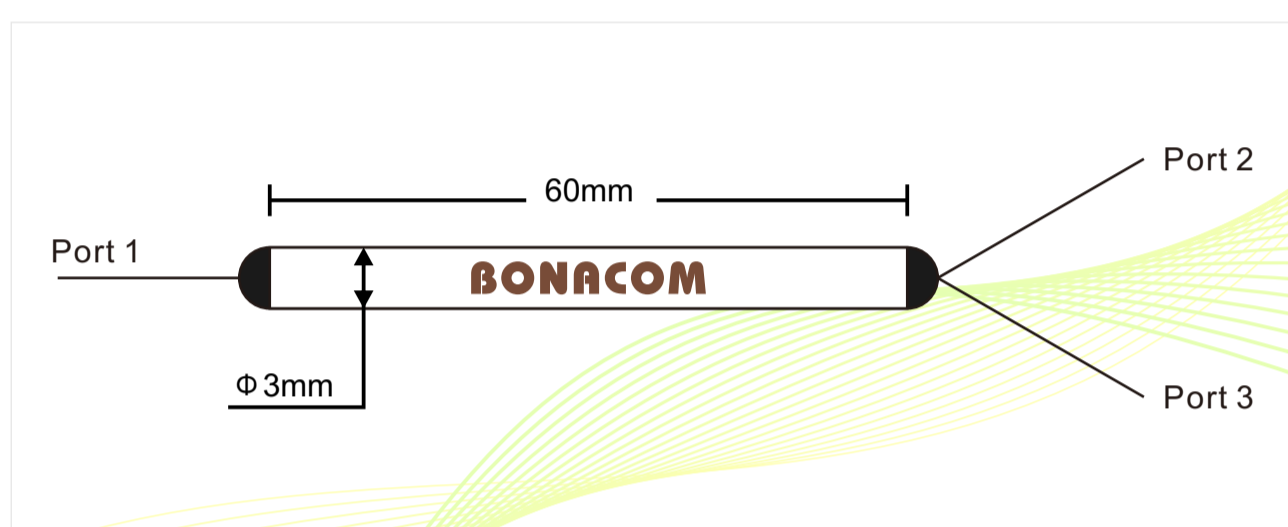

Address: 2F,DF Industrial Park,Shanghenglang Community,Dalang,Longhua New District,Shenzhen,P.R.C.518109.
www.bonaphotonics.com sales@bonaphotonics.com Tel:+0755-21035679

December 2019

Bonacom Technology reserves the right to change any specifications without prior notice.

BN-CG-IS-19-2

Specifications

Parameter	Unit	Value		
Longer Operating Wavelength	nm	2000 \pm 20		
Max. Insertion Loss	dB	0.7		
Min. Extinction Ratio	dB	20		
Min. Isolation	dB	13		
Shorter Operating Wavelength	nm	1570 \pm 20	800 \pm 20	650 \pm 20
Max. Insertion Loss	dB	0.7	0.7	1.5
Min. Extinction Ratio	dB	20	20	20
Min. Isolation	dB	15	15	10
Min. Directivity	dB	55		
Max. Return Loss	dB	50		
Max. Optical Power(CW)	mW	300		
Fiber Type	-	PM 1550 Panda Fiber		
Package Dimension	mm	3*60(bare fiber), ϕ 3*76(900um loose tube), 90*20*10(0.9mm/2.0mm/3.0mm loose tube)		
Operating Temperature	$^{\circ}$ C	-5~+70		
Storage Temperature	$^{\circ}$ C	-40~+85		

For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower.
The default connector key is aligned to slow axis.

Ordering Information

PMFUWDM-1111-2-333-456-777

1111	-Wavelength:	2015=2000/1570, 2080=2000/800, 2065=2000/650
2	-Type:	1=1x2
333	-Fiber type	001=PM1550, 008=SMF-28E, 045=Nufern PM1950, 046=Nufern SM1950
4	-Pigtail type:	0= ϕ 3.0x54mm
5	-Pigtail type:	0=250 μ m bare fiber, 1=900 μ m loose tube, 2=2.0mm loose tube, 3=3.0mm loose tube
6	-Fiber length:	0=0.8m,1=1m
777	-Connector type:	0=FC/UPC,1=FC/APC,2=SC/UPC,3=SC/APC,4=LC/UPC,5=LC/APC

Address: 2F,DF Industrial Park,Shanghenglang Community,Dalang,Longhua New District,Shenzhen,P.R.C.518109.
www.bonaphotonics.com sales@bonaphotonics.com Tel:+0755-21035679

December 2019

Bonacom Technology reserves the right to change any specifications without prior notice.

BN-CG-IS-19-2